

# POLY TILE GROUT

## Cementitious Grout for Tile joints

---

### Product Description

**POLY TILE GROUT** is based on special selected polymerized cementitious compounds

### Typical applications

- Filling walls and floors tile joints.
- Grouting swimming pool tile joints.
- Filling decorative stone joints.

### Product Features

- High bond between tiles.
- High water resistance.
- Easy to apply.

### Properties

#### **Colour**

Gray or white.  
Special colours could be manufactured on order.

#### **Compressive Strength**

5 N/mm<sup>2</sup> after 48 hrs.

#### **Adhesion**

Excellent adhesion to joint tiles.

#### **Water Absorption**

< 5 %.

#### **Working Time**

30 minutes in 35° C.

### Guide For Application

#### **Preparation**

Tile" joints to be filled should be clean from dust.

#### **Mixing**

Mix **POLY TILE GROUT** by adding the powder to clean water at the ratio of 3: 1 until a thick creamy paste is obtained.

### **Application**

Apply **POLY TILE GROUT** to the joints between tiles.

Remove surplus from the face of the tiles. When the grout is dry, clean the tiles with a damp sponge.

### Coverage

10 kg. **POLY TILE GROUT** covers 40 - 50 m<sup>2</sup> depending on the size of tiles.

### Packaging

**POLY TILE GROUT** is supplied in 25 kg. bags.

### Storage

**POLY TILE GROUT** should be stored under shed.

### Shelf Life


One year when stored as recommended.

### Cleaning

Tools should be cleaned immediately with water after use.

### Health And Safety

- **POLY TILE GROUT** is non flammable.
- Any splashes on skin should be washed with water.
- Seek medical assistance in case of contact with eyes, after washing it with running water .

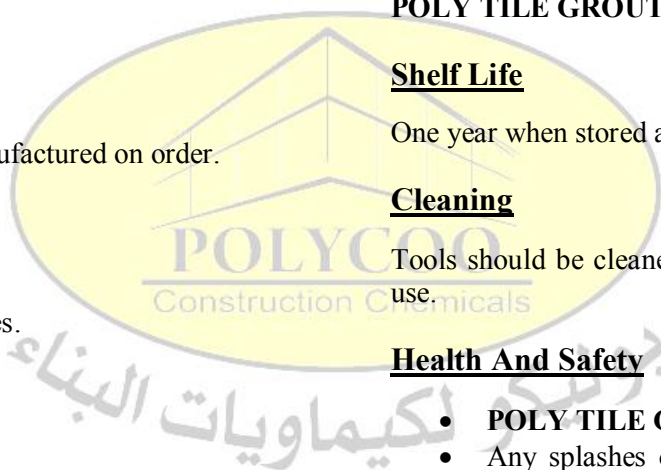

## **Guarantee / Warranty**

We warrant our products to be of good quality and manufactured to rigid standards. This warranty is in lieu of any and all other warranties expressed or implied.

This data sheet is published for information only. It is believed to be correct but no liability is accepted for it or the suitability of the product for any particular purpose.

**POLYCOO** services is free and the company dose not accept liability for any loss arising from it.

## **Technical Services**

For any further technical advice and recommendation for the use of all **POLYCOO** products, please consult the nearest **POLYCOO** technical office.



Under technical collaboration with

**Polycoo Industries Ltd.**

Sole distributor in Egypt: Polycoo Company

[www.polycoo.com](http://www.polycoo.com)

5 Kamel Sedki Street, Ramsis Square, Cairo, Egypt

Sales Tel.: ++202-5918653/++2025918053/++20-122-3102700 Fax: ++202-5918053